



TeSys contactors

For utilisation categories DC-1 to DC-5

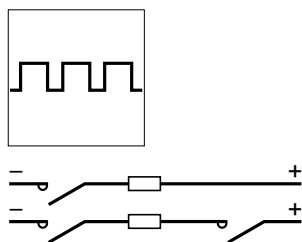

Rated operational current (Ie) in Amperes, in utilisation category DC-1, resistive loads: time constant $\frac{L}{R} \leq 1$ ms, ambient temperature ≤ 60 °C (2)

Rated operational voltage Ue V	No. of poles connected in series	Contactor rating (1)								
		LC1 D09	LC1 DT20	LC1 D12 DT25	LC1 D18 DT32	LC1 D25 DT40	LC1 DT60	LC1 D32	LC1 D38	LC1/LP1 D40
24	1	20	20	20	25	32	40	40	40	50
	2	20	20	20	25	32	40	40	40	50
	3	20	20	20	20	32	40	40	40	50
	4	-	20	20	-	32	40	-	-	50
48/75	1	20	20	20	25	32	40	40	40	50
	2	20	20	20	25	32	40	40	40	50
	3	20	20	20	25	32	40	40	40	50
	4	-	20	20	-	32	40	-	-	50
125	1	4	4	4	4	7	7	7	7	7
	2	20	20	20	25	32	40	40	40	50
	3	20	20	20	25	32	40	40	40	50
	4	-	20	20	-	32	40	-	-	50
225	1	1	1	1	1	1	1	1	1	1
	2	4	4	4	4	7	7	7	7	7
	3	20	20	20	25	32	40	40	40	50
	4	-	20	20	-	32	40	-	-	50
300	3	-	-	-	-	-	-	-	-	-
	4	-	20	20	-	32	40	-	-	50
460	1	-	-	-	-	-	-	-	-	-
	4	-	-	-	-	-	-	-	-	-
900	2	-	-	-	-	-	-	-	-	
1200	3	-	-	-	-	-	-	-	-	
1500	4	-	-	-	-	-	-	-	-	

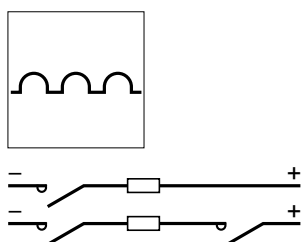

Rated operational current (Ie) in Amperes, in utilisation category DC-2 to DC-5, resistive loads: time constant $\frac{L}{R} \leq 15$ ms, ambient temperature ≤ 60 °C (2)

Rated operational voltage Ue V	No. of poles connected in series	Contactor rating (1)								
		LC1 D09	LC1 DT20	LC1 D12 DT25	LC1 D18 DT32	LC1 D25 DT40	LC1 DT60	LC1 D32	LC1 D38	LC1 D40
24	1	20	20	20	25	32	40	40	40	50
	2	20	20	20	25	32	40	40	40	50
	3	20	20	20	25	32	40	40	40	50
	4	-	20	20	-	32	40	-	-	50
48/75	1	8	8	8	8	32	40	40	40	50
	2	20	20	20	25	32	40	40	40	50
	3	20	20	20	25	32	40	40	40	50
	4	-	20	20	-	32	40	-	-	50
125	1	2	2	2	2	3	3	3	3	4
	2	15	15	15	15	32	40	40	40	50
	3	20	20	20	25	32	40	40	40	50
	4	-	20	20	-	32	40	-	-	50
225	1	0.5	0.5	0.5	0.5	1	1	1	1	1
	2	2	2	2	2	3	3	3	3	4
	3	8	8	8	8	32	40	40	40	50
	4	-	20	20	-	32	40	-	-	50
300	3	-	-	-	-	-	-	-	-	-
	4	-	8	8	-	32	40	-	-	50
460	1	-	-	-	-	-	-	-	-	-
	4	-	-	-	-	-	-	-	-	-
900	2	-	-	-	-	-	-	-	-	
1200	3	-	-	-	-	-	-	-	-	
1500	4	-	-	-	-	-	-	-	-	

(1) For rated operational currents of contactors LC1 and LP1 K: please consult your Regional Sales Office.

LC1 D50	LC1/LP1 D65	LC1/LP1 D80	LC1 D95	LC1 D115	LC1 D150	LC1 F185	LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 BL	LC1 BM	LC1 BP	LC1 BR
65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
-	65	100	-	200	-	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
-	65	100	-	200	-	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
7	7	12	12	200	200	210	230	270	320	380	520	760	1180	760	700	1100	1750	2400
65	65	100	100	200	200	210	230	270	320	380	520	760	1180	760	700	1100	1750	2400
65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
-	65	100	-	200	-	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
1	1.5	1.5	1.5	10	10	-	-	-	-	-	-	-	-	-	700	1100	1750	2400
7	7	12	12	200	200	190	200	250	280	350	450	700	1000	700	700	1100	1750	2400
65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
-	65	100	-	200	-	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
-	-	-	-	200	200	190	200	250	280	350	450	700	1000	700	700	1100	1750	2400
-	65	100	-	200	-	240	260	300	360	430	580	850	1000	850	700	1100	1750	2400
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	700	1100	1750	2400
-	-	-	-	200	-	190	200	250	280	350	450	700	1000	700	700	1100	1750	2400
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	700	1100	1750	2400
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	700	1100	1750	2400
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	700	1100	1750	2400

LC1 D50	LC1/LP1 D65	LC1/LP1 D80	LC1 D95	LC1 D115	LC1 D150	LC1 F185	LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 BL	LC1 BM	LC1 BP	LC1 BR
65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
-	65	100	-	200	-	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	-	-	-	-
65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
-	65	100	-	200	-	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
4	4	5	5	200	200	-	-	-	-	-	-	-	-	-	700	1100	1750	2400
65	65	40	40	200	200	160	180	250	300	350	500	700	1000	700	700	1100	1750	2400
65	65	60	60	200	200	240	240	280	310	350	550	850	1000	850	700	1100	1750	2400
-	65	72	-	200	-	240	240	280	310	350	550	850	1000	850	700	1100	1750	2400
1	1.5	2	2	3	3	-	-	-	-	-	-	-	-	-	700	1100	1750	2400
4	4	5	5	200	200	140	160	220	280	310	480	680	900	680	700	1100	1750	2400
65	65	100	100	200	200	160	180	250	300	350	500	700	1000	700	700	1100	1750	2400
-	65	100	-	200	-	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
-	-	-	-	200	200	140	160	220	280	310	480	680	900	680	700	1100	1750	2400
-	65	100	-	200	-	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	700	1100	1750	2400
-	-	-	-	200	-	140	160	220	280	310	480	680	800	680	700	1100	1750	2400
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	700	1100	1750	2400
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	700	1100	1750	2400
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	700	1100	1750	2400

(2) Contactors LC1 F and LC1 B operating at an ambient temperature of 40 °C, have higher operational currents: please consult your Regional Sales Office.

Selection according to required electrical durability, use in categories DC-1 to DC-5


The criteria for contactor selection are:

- the rated operational current I_e ,
- the rated operational voltage (U_e),
- the utilisation category and the time constant L/R,
- the required electrical durability.

Maximum operating rate (operating cycles)

The following operating rate must not be exceeded: 120 operating cycles/hour at rated operational current I_e .

Electrical durability

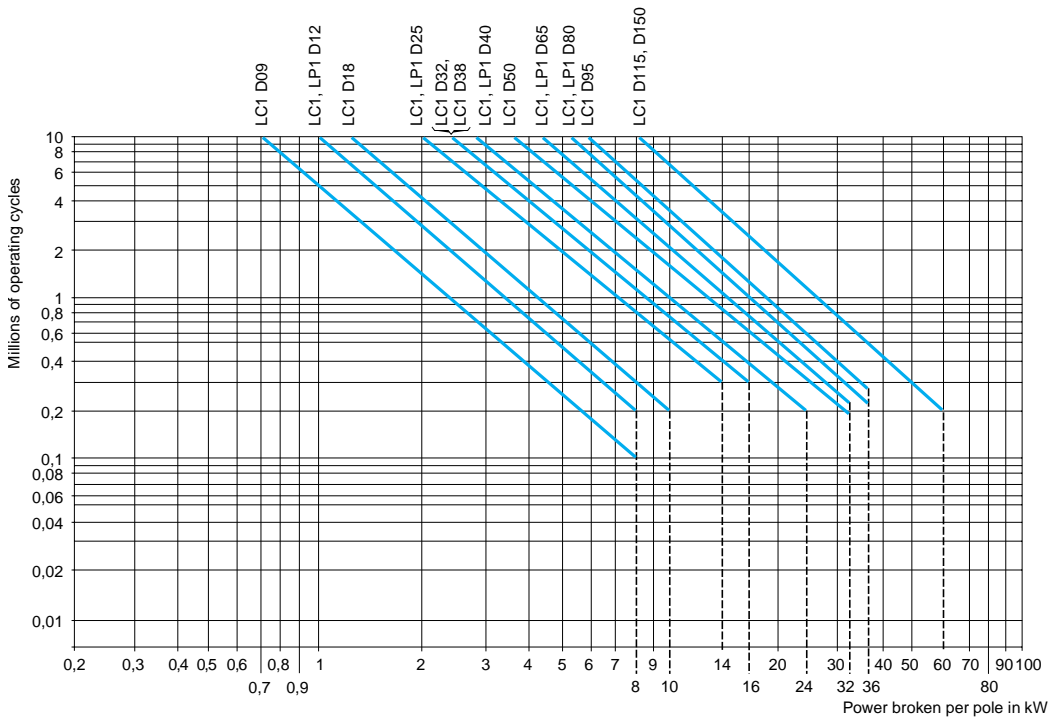


Example

Series wound motor - $P = 1.5 \text{ kW}$ - $U_e = 200 \text{ V}$ - $I_e = 7.5 \text{ A}$. Utilisation: reversing, inching.

- Utilisation category = DC-5.
- Select contactor LC1 D25 or LP1 D25 with 3 poles in series.
- The power broken is: $P_c \text{ total} = 2.5 \times 200 \times 7.5 = 3.75 \text{ kW}$.
- The power broken per pole is: 1.25 kW .
- The electrical durability read from the curve is $\geq 10^6$ operating cycles.

Use of poles in parallel



Electrical durability can be increased by using poles connected in parallel.

With N poles connected in parallel, the electrical durability becomes: electrical durability read from the curves $\times N \times 0.7$.

Note: 1

When the poles are connected in parallel, the maximum operational currents indicated on pages 24560/2 and 24560/3 must not be exceeded.

Note: 2

Ensure that the connections are made in such a way as to equalise the currents in each pole.


Selection according to required electrical durability, use in categories DC-1 to DC-5

Determining the electrical durability

The electrical durability can be read directly from the curves below, having previously calculated the power broken as follows:
 $P \text{ broken} = U \text{ broken} \times I \text{ broken}$.

The tables below give the values of U_c and I_c for the various utilisation categories.

Power broken			
Utilisation categories:	U broken	I broken	P broken
DC-1 Non inductive or slightly inductive loads	U_e	I_e	$U_e \times I_e$
DC-2 Shunt wound motors, breaking whilst motor running	$0.1 U_e$	I_e	$0.1 U_e \times I_e$
DC-3 Shunt wound motors, reversing, inching	U_e	$2.5 I_e$	$U_e \times 2.5 I_e$
DC-4 Series wound motors, breaking whilst motor running	$0.3 U_e$	I_e	$0.3 U_e \times I_e$
DC-5 Series wound motors, reversing, inching	U_e	$2.5 I_e$	$U_e \times 2.5 I_e$

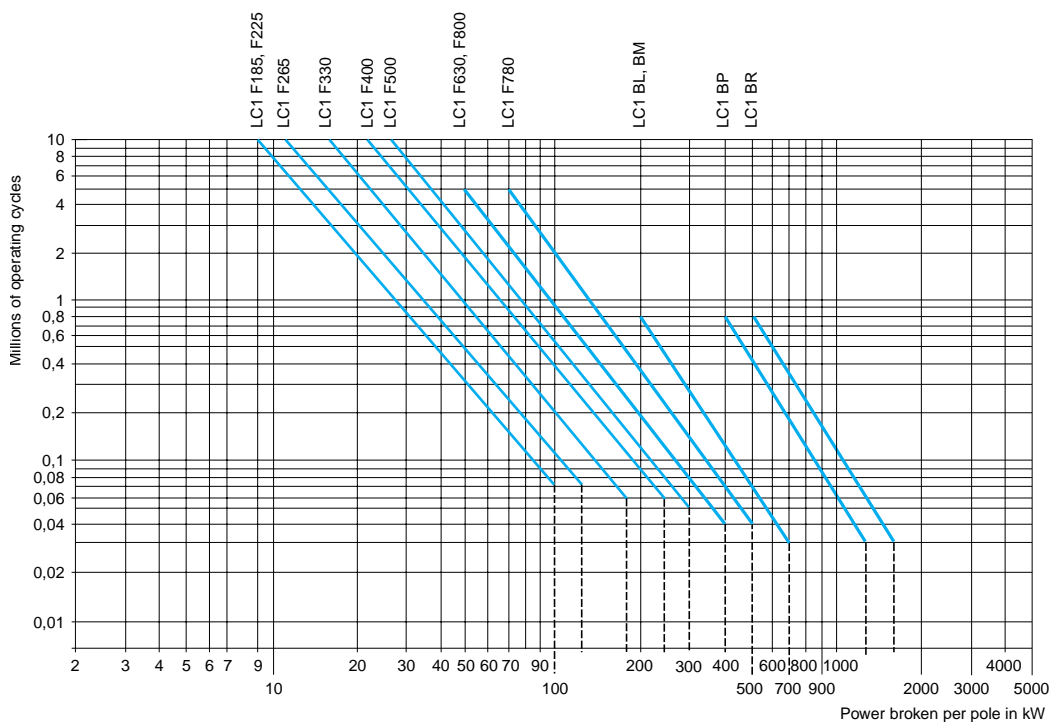

Example

Series wound motor: $P = 40 \text{ kW}$ - $U_e = 200 \text{ V}$ - $I_e = 200 \text{ A}$. Utilisation: reversing, inching.
 Utilisation category = DC-5.

- Select contactor LC1 F265 with 2 poles in series.
- The power broken is: $P_c \text{ total} = 2.5 \times 200 \times 200 = 100 \text{ kW}$.
- The power broken per pole is 50 kW.
- The electrical durability read from the curve is 400 000 operating cycles.